

CULTA LED S 4 P S3

TECHNICAL DATA



FITTED WITH	1 x LED Spotlight MR 11 D69.009.000-00686991 - 12 V
LUMINOUS POWER	1 100 lux / 0.5 m *
LIGHTING FIELD 0.5 m	Ø 60 cm *
COLOR RENDERING INDEX	CRI > 80
COLOR TEMPERATURE	3000 K *
OPERATION EQUIPMENT	Electronic plug-in transformer
VOLTAGE	100-240 V; 50/60 Hz
CORD LENGTH	2 m Euro
LUMINAIRE BODY	Polycarbonate (PC), satin
WEIGHT (NET)	1,6 kg
POWER CONSUMPTION	4 W
LUMINOUS FLUX	240 lm
USAGE	Cord switch
CLASS OF PROTECTION	II
STANDARDS MET	EN 60598-1, EN 60598-2-25
SPECIAL FEATURES	Cord switch
MOUNTING	Mounting pin (Ø 16 mm)
ACCESSORIES	Lamp decor: Foil / Rattan, Lamp shade: white
ORDER NUMBER	D15.727.000-00689653

CARE AND READING LIGHTS




LIGHT DISTRIBUTION

Measuring distance 0.5 m

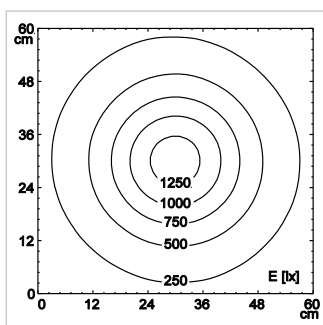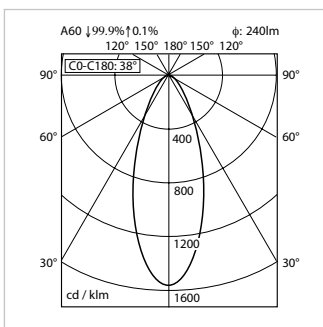

TECHNICAL DRAWING

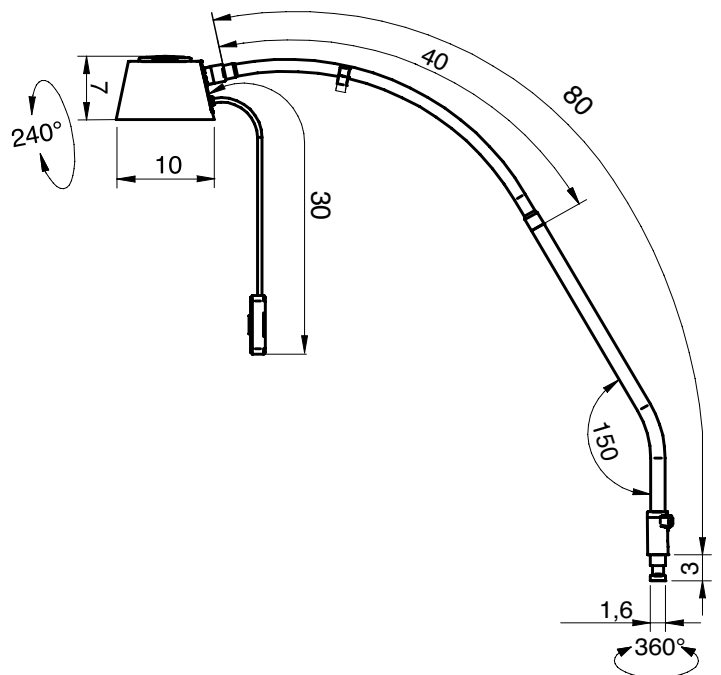

CULTA LED S 4 B S9

TECHNICAL DATA



FITTED WITH	1 x LED Spotlight MR 11 D69.009.000-00686991 - 12 V
LUMINOUS POWER	1 100 lux / 0.5 m *
LIGHTING FIELD 0.5 m	Ø 60 cm *
COLOR RENDERING INDEX	CRI > 80
COLOR TEMPERATURE	3000 K *
OPERATION EQUIPMENT	Electronic plug-in transformer
VOLTAGE	100-240 V; 50/60 Hz
CORD LENGTH	2 m Euro
LUMINAIRE BODY	Polycarbonate (PC), satin
WEIGHT (NET)	1,6 kg
POWER CONSUMPTION	4 W
LUMINOUS FLUX	240 lm
USAGE	Cord switch
CLASS OF PROTECTION	II
STANDARDS MET	EN 60598-1, EN 60598-2-25
SPECIAL FEATURES	Cord switch
MOUNTING	Universal bed adapter
ORDER NUMBER	D15.725.000-00689635

CARE AND READING LIGHTS




LIGHT DISTRIBUTION

Measuring distance 0.5 m

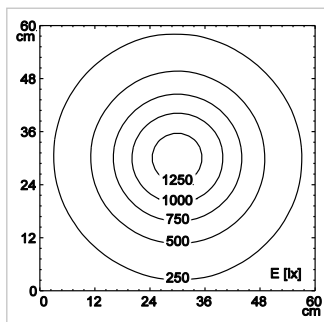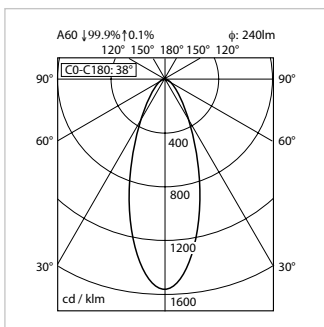

TECHNICAL DRAWING

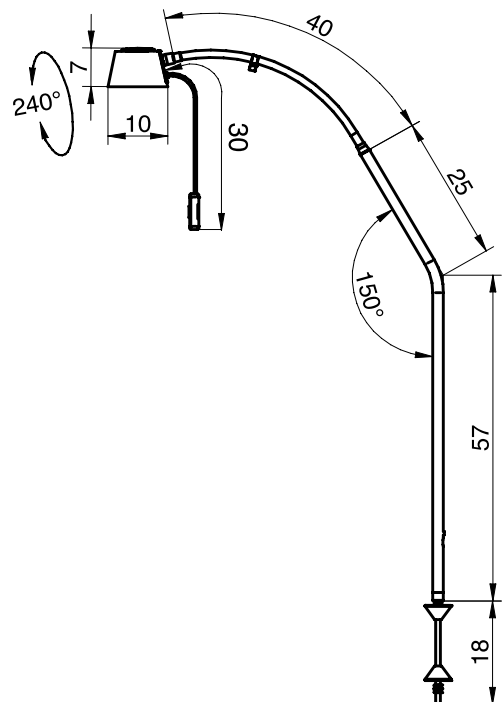

measurements in centimeters